




CX108H

Caturra

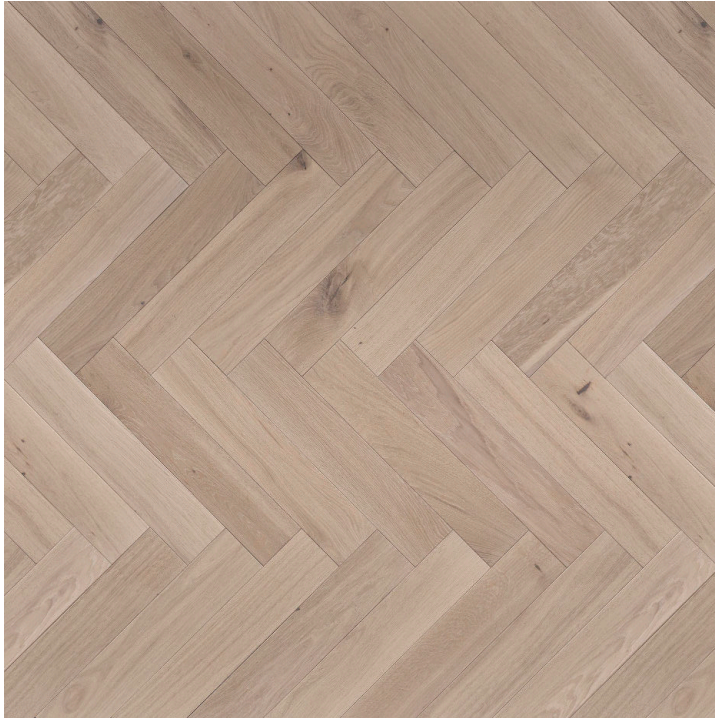

Product Specification

Product Code	CX108H
Collection	Baristi
Construction	Engineered
Species	European Oak
Product Type	Engineered Herringbone
Surface	Brushed & Coloured Oiled
Finish	UV Cured Oil
Dimensions	100 x 15/4 x 500 mm
Top Layer	4 mm - Solid European Oak
Core Layer	11 mm - Multi Ply: Birch
Grade	BCD Rustic
Pack Size	0.6 m ²
Pack Contents	12 Blocks
Joint Type	Tongue & Groove
Edge Profile	Bevel Edged on 4 sides

Grading: Rustic

This floor may contain varying amounts of live and dead filled knots. In addition, the floor will contain Heartwood and Sapwood, offering a wider range of colour variation, and Expert Checks can be expected (cracks along the growth ring). The colour of the filler used on this floor is intended to complement the natural structure of the wood, and such may contrast the surrounding timber, as can be seen in knots. This may vary from batch to batch.

Technical Information

Origin	Poland
UKTR/ UK Timber Regulation	Compliant
FSC® Certification	Not available with this product
PEFC® Certification	Not available with this product
Janka Hardness	Oak 1360 lbf (6000N)
Slip Resistance	EN 14231 (Test Result 80/46 PTV)
European Reaction to Fire Classification	EN 13501-1 (test result Dfl-s1)
Release of Formaldehyde	EN 717-1 (Test result E1)
Thermal Conductivity	EN 12524 (Test result: 0.143 W/mK)

Installation Methods

Fully Bonded	Yes*
Secret Nailed	No
Floated on Underlay	No
V4Magnetic®	Yes**
Over Underfloor Heating	Yes*

* Subject to correctly prepared and compatible subfloor in conjunction with correct installation and usage.

** Find out more at www.v4.co.uk/v4magnetic

Installation - Important Guidance:

All V4 floors must be installed by an experienced and fully competent flooring installer who have the necessary skills to complete each installation in line with the BS8201:2011 standard. The responsibility for inspection the of goods lies with the installer, and it is their duty to notify V4 of any potential concerns prior to installation. **Installation of your V4 floor is considered acceptance of goods.**

For full guides visit v4.co.uk/support or scan the Product QR code below.

Post Installation - Important Note:

DO NOT COVER AN INSTALLED WOOD FLOOR WITH A NON-BREATHABLE COVERING FOR LONGER THAN 1 WEEK. Prolonged covering may create a microclimate which can damage the protective top layer. Underfloor heating will greatly magnify the effect.

Scan QR code for more product info:



- Installation Guides
- Underfloor Heating Advice
- Maintenance Schedule
- Floorcare Advice
- Product Images
- Room Visualiser
- Order FREE samples

Explore our full range of flooring solutions at v4.co.uk

Commercial Enquiry

Tel +44(0)1276 859111

Email design@v4.co.uk

Residential Enquiry

Tel +44(0)1276 488099

Email enquiries@v4.co.uk

2024© This technical data sheet was written by V4 Wood Flooring Ltd. Greenbays Park Carthouse Lane, Horsell, Surrey GU21 4YP. At the time of writing and publication of sheet, all the information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. The photographs used in this sheet are intended only as illustrations. No rights can be derived from them.